




Commercial Architectural Products

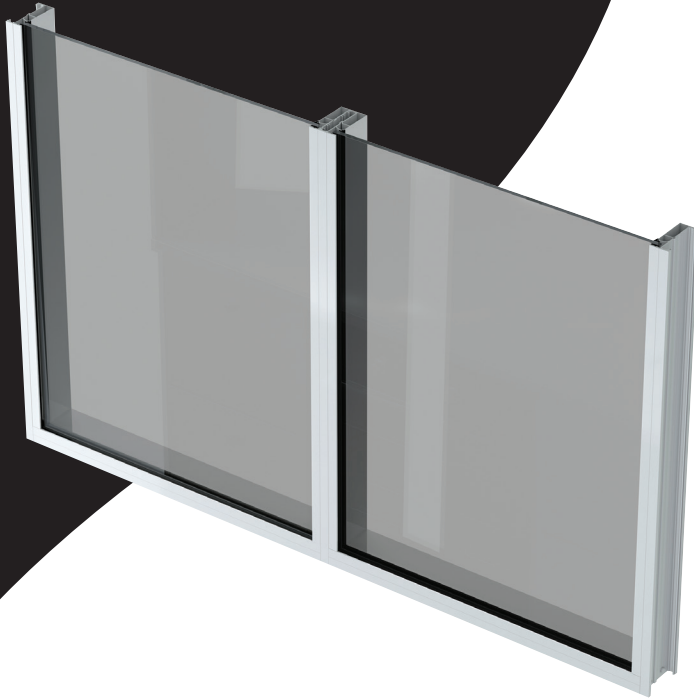

SLIMFRONT SERIES SS 3520 STOREFRONT SYSTEM

The Slimfront impact-resistant storefront system designed specifically for high design pressure applications.

Engineered with flexibility in mind, this storefront system not only incorporates various glass options and panel configurations, it easily integrates with our SE 3550 Storefront Entry Door system. Developed to provide ultimate protection from the elements, water will not penetrate this wet seal, non-weep system.

PANEL SIZE	GLASS	FRAME TYPE	DP RATING
48"x97 3/4"	1/16" H/H PVB or 1 1/4" LIG (1/16" H/H PVB - 7/16" airspace 1/4" T)	5" Unreinforced	+70/-80 psf
48"x120"	1/16" H/H SG or 1 1/4" LIG (1/16" H/H SG - 7/16" airspace 1/4" T)	5" Steel Reinforced	+90/-120 psf
60"x120"	1/16" H/H SG or 1 1/4" LIG (1/16" H/H SG - 7/16" airspace 1/4" T)	5" Steel Reinforced	+90/-100 psf
48"x144"	1/16" H/H SG or 1 1/4" LIG (1/16" H/H SG - 7/16" airspace 1/4" T)	5" Steel Reinforced	+61.5/-68.3 psf
60"x144"	1/16" H/H SG or 1 1/4" LIG (1/16" H/H SG - 7/16" airspace 1/4" T)	7" HD Unreinforced	+60/-60 psf

	WIDTH	HEIGHT	STANDARD FEATURES	OPTIONS
MINIMUM SIZES				
Storefront panel system	14 1/2"	14 1/2"	<ul style="list-style-type: none"> ▶ 6063-T6 aluminum alloy ▶ 1" x 5" frame member ▶ 1" x 7" HD frame member ▶ White, Bronze, Clear Anodize frame color ▶ Interior glazed ▶ HD panel system un-reinforced ▶ Stainless steel assembly screws ▶ 1/16" laminated glass ▶ 1 1/4" laminated insulating glass ▶ No jamb anchor ▶ FBC Certification 	<ul style="list-style-type: none"> ▶ White interlayer ▶ Custom color ▶ Clear glass color ▶ Popular glass tints ▶ Low-E ▶ Argon Gas
MAXIMUM SIZES				
Storefront panel system—unreinforced	48"	97 3/4"		
Storefront panel system—steel reinforced	60" 48"	120" 144"		
Storefront HD panel system – un-reinforced	60"	144"		

[Refer to certification document for performance requirements and options]